



ONE STOPE SOLUSION SERVICE

Hotel project · Apartment project · Shopping mall project

Bathroom toilet/ Washroom toilet

Foshan CYT Stone Co.,Ltd

www.cytstone.com

info@cytstone.com

Office Add : Van Building, Shunde District, Foshan
City,Guangdong Province,China

Factory Add : Xiadong Industry, Yuncheng District,
Yunfu City,Guangdong Province,China

SMART TOILET



Explore the innovation art of bathroom living

We focused in breaking out the traditional bathroom space limited, redefining the high-quality living styles with the simple and unique design philosophy, presenting the solution in sanitary ware which integrating intelligence, comfort and beauty in one.

Convenient lift at your fingertip

Convenient and comfortable experience, as intimate as personal customization. Every use, it's not only a tribute to the quality of life, but also add a warmth and comfort feeling.

Sensing automatically opening

The function of sensing automatically opening, truly achieve a contact-less hygiene experience. When you approach to the toilet, the cover will open automatically. When you leave, it will flush automatically and close the cover softly.

Completely relax both physically and mentally

Innovative design, personalized settings and other cutting-edge technologies are more convenient and enjoyable when using. Various functions can be easily adjusted to meet your different usage needs.



DXT9



Seat Ring Heating



Auto Opening



Foot Sensor Opening



Foot Sensor Flushing



Pre-wash



Off-seat Auto Flushing



Self-cleaning Nozzle



Posterior Cleaning



Posterior Cleaning



Massage



Build-in Tank



Auto Deodorization



Warm Air Dryer



Adjustable temperature
Adjustable water pressure



Remote Control



Waterproof IPX4



LED Display



Night Light

Dimension: L695×W390×H495mm

Rough-in: S-trap 300mm (200-450mm)



Rated voltage: 110V/ 220V

Heating mode: Instant heating

Flushing mode: Siphon, tornado flush

Water consumption: 4.8L

Floor standing toilet

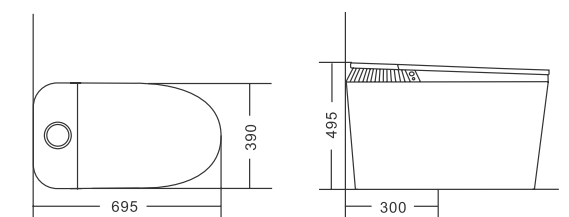



DXT993



Seat Ring Heating



Auto Opening



Foot Sensor Opening



Foot Sensor Flushing



Pre-wash



Off-seat Auto Flushing



Self-cleaning Nozzle



Posterior Cleaning



Posterior Cleaning



Massage



Build-in Tank



Auto Deodorization



Warm Air Dryer



Adjustable temperature
Adjustable water pressure



Remote Control



Waterproof IPX4



LED Display



Night Light

Dimension: L680×W397×H441mm

Rough-in: S-trap 300mm (200-450mm)




Rated voltage: 110V/ 220V

Heating mode: Instant heating

Flushing mode: Siphon, tornado flush

Water consumption: 4.8L

Floor standing toilet

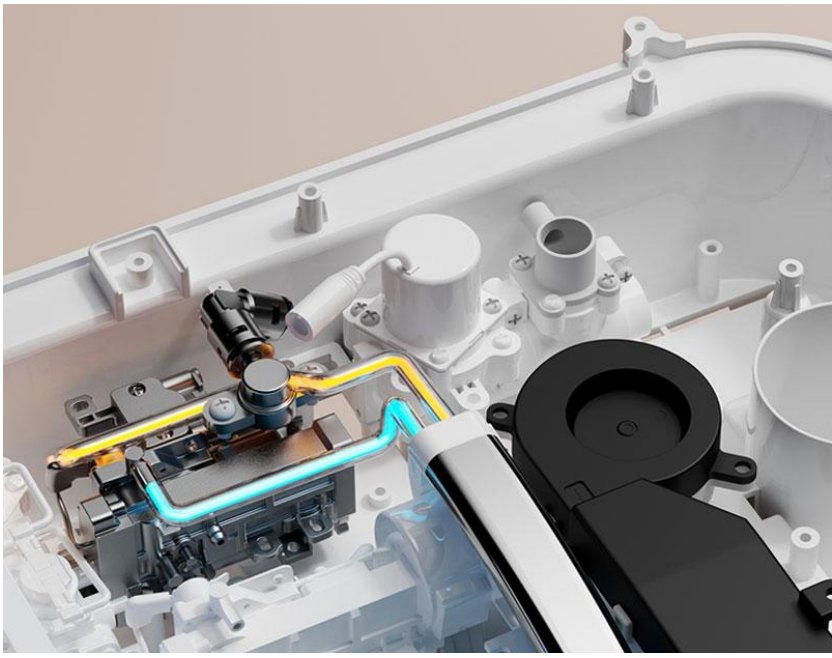



DXV9



Seat Ring Heating



Auto Opening



Foot-touch Opening



Foot-touch Flushing



Pre-wash



Off-seat Auto Flushing



Self-cleaning Nozzle



Posterior Cleaning



Posterior Cleaning



Massage



Build-in Tank



Auto Deodorization



Warm Air Dryer



Adjustable temperature
Adjustable water pressure



Remote Control



Waterproof IPX4



LED Display



Night Light

Dimension: L705×W445×H480mm

Rough-in: S-trap 300mm (200-450mm)


Rated voltage: 110V/ 220V

Heating mode: Instant heating

Flushing mode: Siphon, tornado flush

Water consumption: 4.8L

Floor standing toilet

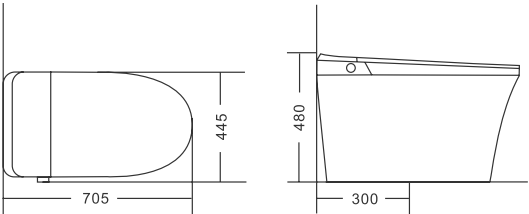



DXV6

- | | | | |
|---|--|---|---|
| 
Seat Ring Heating | 
Auto Opening | 
Foot-touch Opening | 
Foot-touch Flushing |
| 
Pre-wash | 
Off-seat Auto Flushing | 
Self-cleaning Nozzle | 
Posterior Cleaning |
| 
Posterior Cleaning | 
Massage | 
Build-in Tank | 
Auto Deodorization |
| 
Warm Air Dryer | 
Adjustable temperature
Adjustable water pressure | 
Remote Control | 
Waterproof IPX4 |
| 
LED Display | 
Night Light | | |

Dimension: L705×W435×H475mm

Rough-in: S-trap 300mm (200-450mm)


Rated voltage: 110V/ 220V

Heating mode: Instant heating

Flushing mode: Siphon, tornado flush

Water consumption: 4.8L

Floor standing toilet

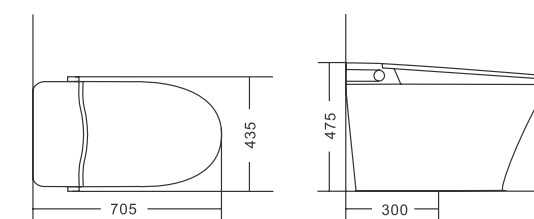



DX832

- | | | | |
|---|--|---|---|
| 
Seat Ring Heating | 
Auto Opening | 
Foot Sensor Opening | 
Foot Sensor Flushing |
| 
Pre-wash | 
Off-seat Auto Flushing | 
Self-cleaning Nozzle | 
Posterior Cleaning |
| 
Posterior Cleaning | 
Massage | 
Build-in Tank | 
Auto Deodorization |
| 
Warm Air Dryer | 
Adjustable temperature
Adjustable water pressure | 
Remote Control | 
Waterproof IPX4 |
| 
LED Display | 
Night Light | | |

Dimension: L580×W380×H360mm

Rough-in: S-trap 300mm (200-450mm)


Rated voltage: 110V/ 220V

Heating mode: Instant heating

Flushing mode: Siphon, tornado flush

Water consumption: 4.8L

Floor standing toilet

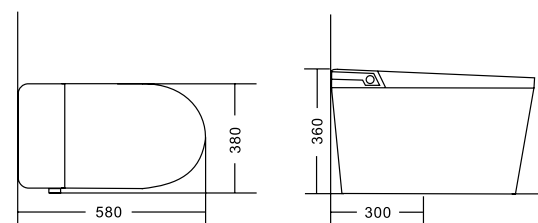

DX952

- | | | | |
|---|--|---|---|
| 
Seat Ring Heating | 
Auto Opening | 
Foot Sensor Opening | 
Foot Sensor Flushing |
| 
Pre-wash | 
Off-seat Auto Flushing | 
Self-cleaning Nozzle | 
Posterior Cleaning |
| 
Posterior Cleaning | 
Massage | 
Build-in Tank | 
Auto Deodorization |
| 
Warm Air Dryer | 
Adjustable temperature
Adjustable water pressure | 
Remote Control | 
Waterproof IPX4 |
| 
LED Display | 
Night Light | | |

Dimension: L700×W400×H480mm

Rough-in: S-trap 300mm (200-450mm)


Rated voltage: 110V/ 220V

Heating mode: Instant heating

Flushing mode: Siphon, tornado flush


Water consumption: 4.8L

Floor standing toilet

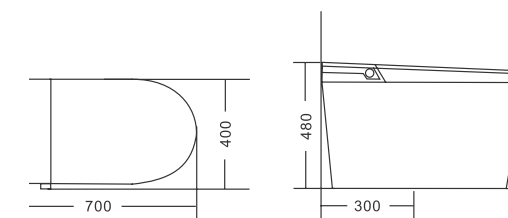



DXG830

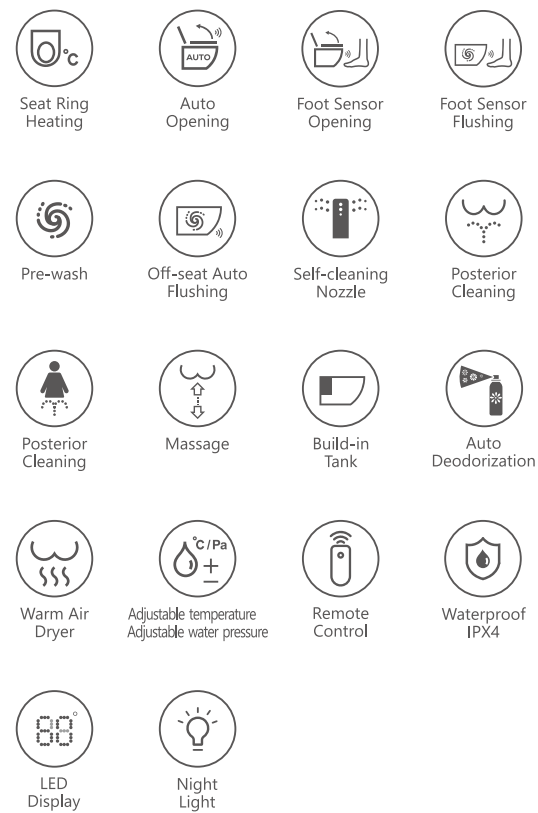

Dimension: L590×W380×H390mm

Rough-in: P-trap 180mm


Rated voltage: 110V/ 220V

Heating mode: Instant heating


Flushing mode: Siphon, tornado flush

Water consumption: 4.8L

Wall-hung toilet

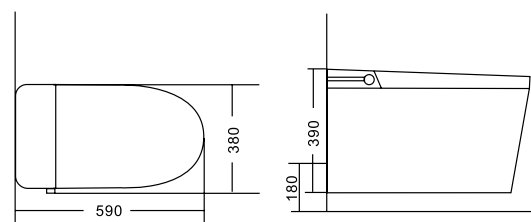

DX2329

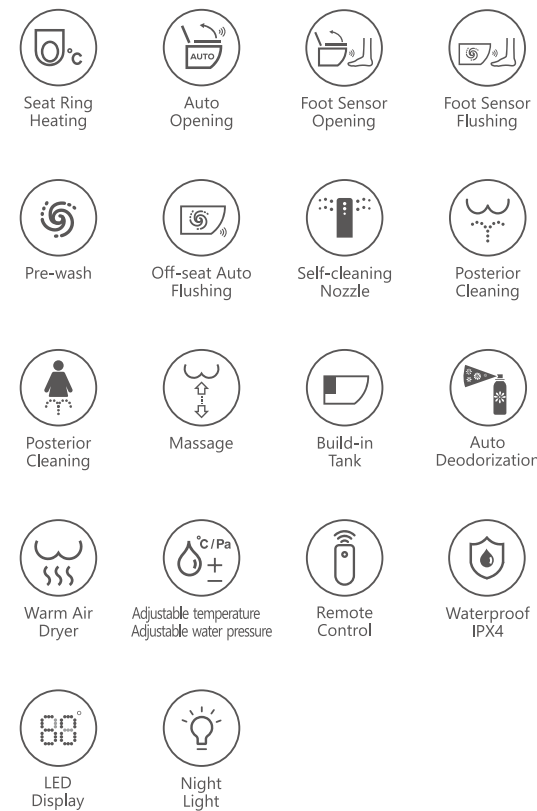

Dimension: L680×W420×H470mm

Rough-in: S-trap 300mm (200-450mm)


Rated voltage: 110V/ 220V

Heating mode: Instant heating

Flushing mode: Siphon, tornado flush

Water consumption: 4.8L

Floor standing toilet

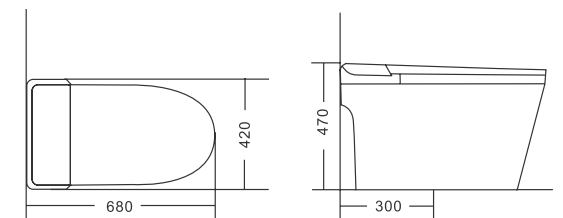

CERAMIC TOILET



Soft-closing Seat Cover

Slow seat cover technology can reduce the noise, collision and breakage of the seat cover when it's closed.



Sewer Glazing

The inner surface of sewer is glazed so that the sewer is smooth and nowhere for dirt to hide, and no blocking anymore.



Big Pipe Has More Momentum

The pipeline design with enlarge diameter, with new channels and high temperature treatment, the glaze reaches a fine and smooth texture, and is highly smooth, which can help the dirt to wash instantly and clean as new.





DXC2169



Type: one-piece toilet

Dimension: 730×420×750mm



Rough-in: S-trap 305mm

Fully glazed tray way

Flush value: 3"

*1.1Gpf/ 1.6Gpf Dual Flush available

*Chrome plated/ white plastic hand lever available

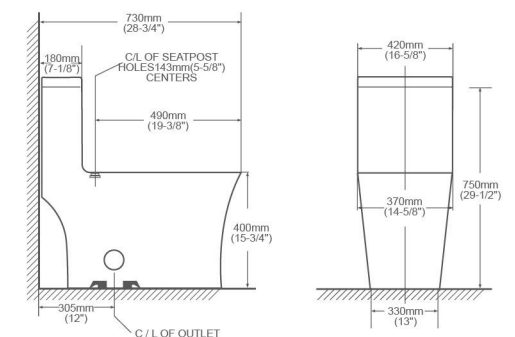



DXC2022

Type: one-piece toilet

Dimension: 695×370×700mm


Rough-in: S-trap 305mm


Fully glazed tray way

Flush value: 3"

*1.1Gpf/ 1.6Gpf Dual Flush available

*Chrome plated/ white plastic hand lever available

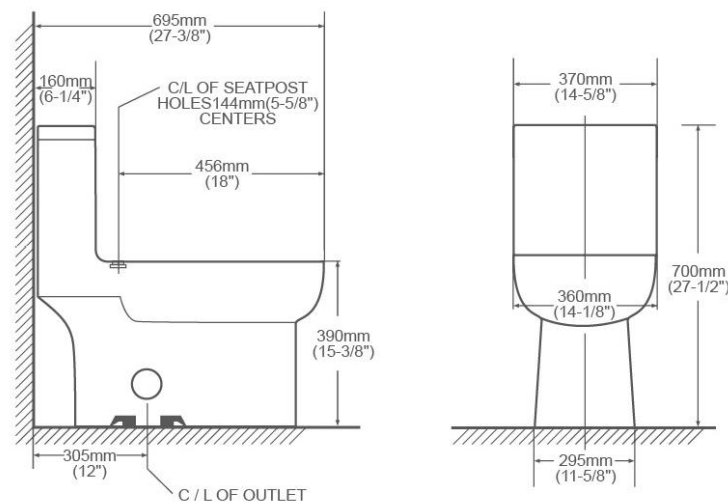

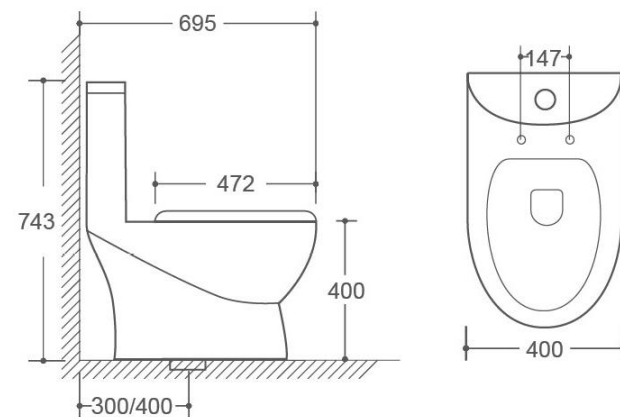


Type: one-piece toilet

Dimension: 695×400×743mm

Rough-in: S-trap 300/400mm

Flushing mode: Siphon

DXC2091

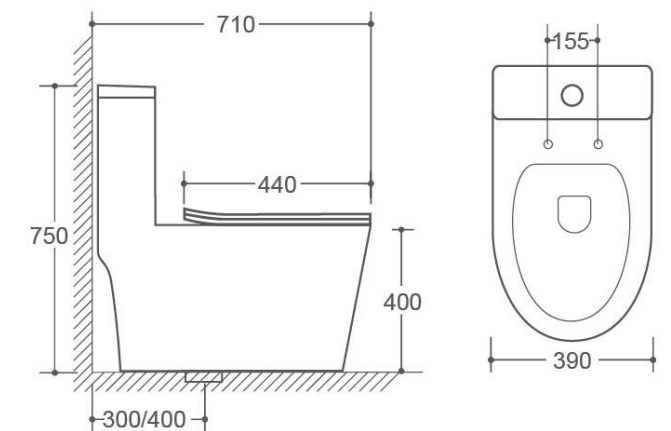


Type: one-piece toilet

Dimension: 710×390×750mm

Rough-in: S-trap 300/400mm

Flushing mode: Siphon

DXC2110

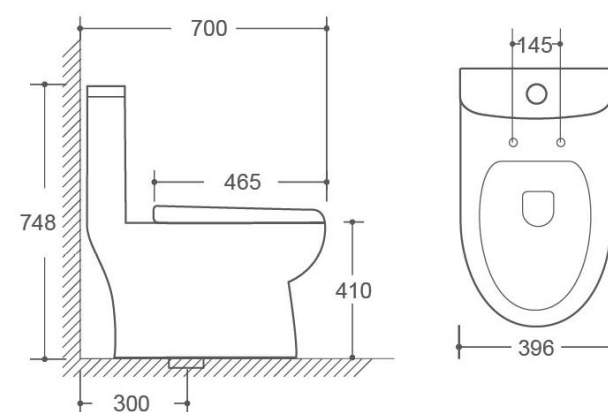


Type: one-piece toilet

Dimension: 700×396×748mm

Rough-in: S-trap 300mm

Flushing mode: Siphon, tornado flush

DXC2126

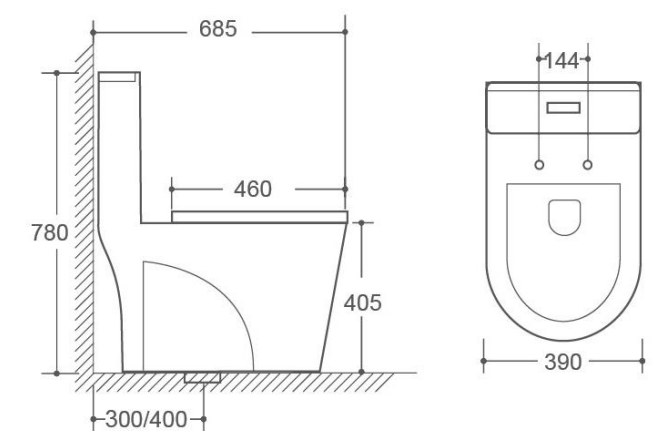


Type: one-piece toilet

Dimension: 685×390×780mm

Rough-in: S-trap 300/400mm

Flushing mode: Siphon

DXC2140

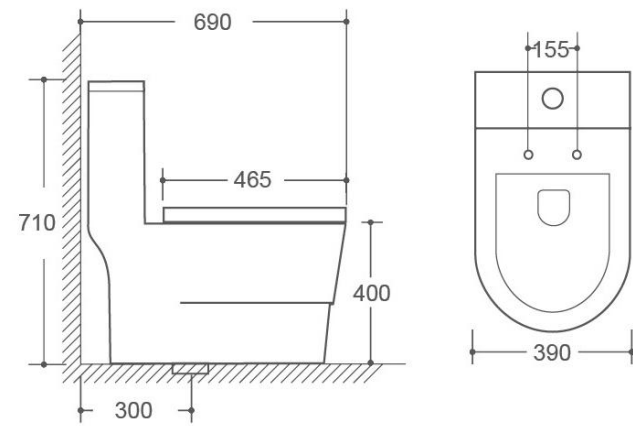


Type: one-piece toilet

Dimension: 690×390×710mm

Rough-in: S-trap 300mm

Flushing mode: Siphon

DXC2172

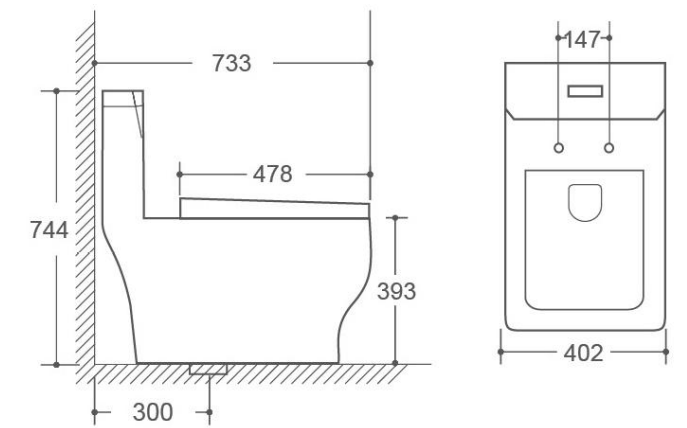


Type: one-piece toilet

Dimension: 733×402×744mm

Rough-in: S-trap 300mm

Flushing mode: Siphon

DXC2177

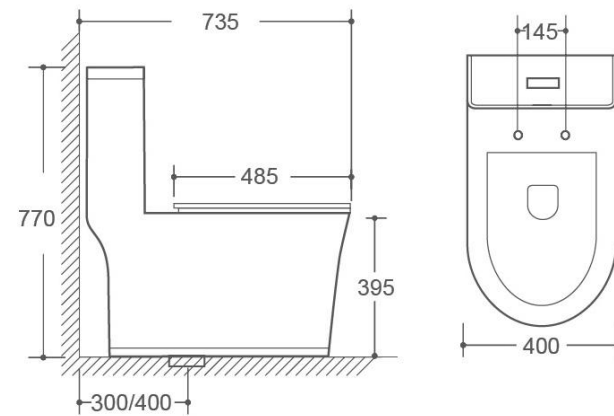


Type: one-piece toilet

Dimension: 735×400×770mm

Rough-in: S-trap 300/400mm

Flushing mode: Siphon

DXC2192

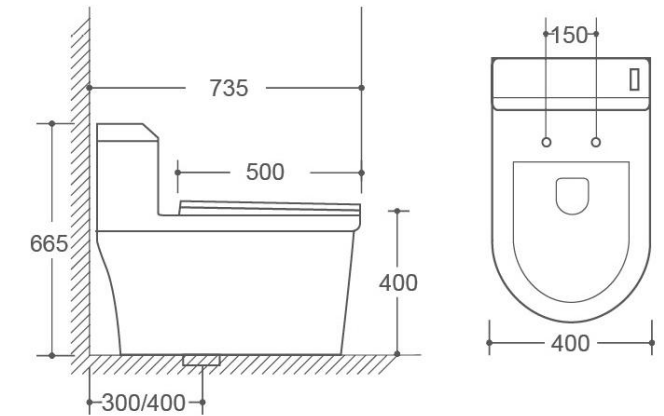


Type: one-piece toilet

Dimension: 735×400×665mm

Rough-in: S-trap 300/400mm

Flushing mode: Siphon

DXC2193

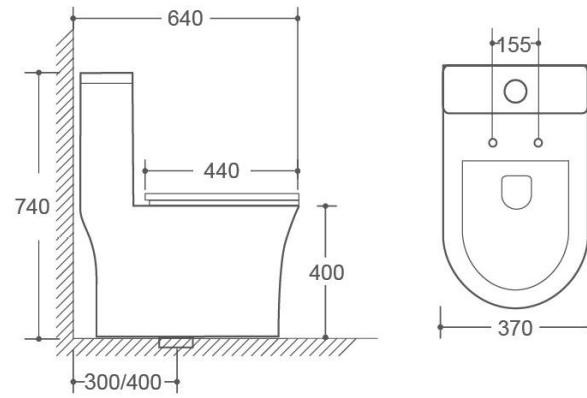


Type: one-piece toilet

Dimension: 640×370×740mm

Rough-in: S-trap 300/400mm

Flushing mode: Siphon

DXC2210

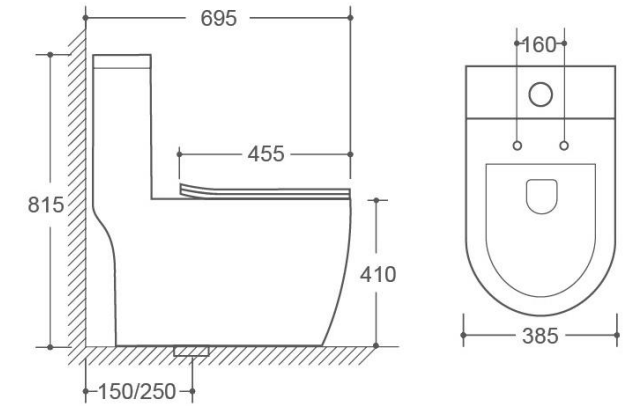


Type: one-piece toilet

Dimension: 695×385×815mm

Rough-in: S-trap 150/250mm

Flushing mode: Washdown

DXC2239

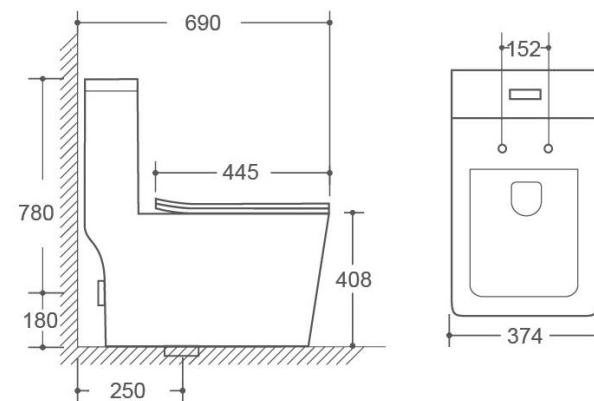

Type: one-piece toilet


Dimension: 690×374×780mm

Rough-in: S-trap 250mm

Rough-in: P-trap 180mm

Flushing mode: Washdown

DXC2240

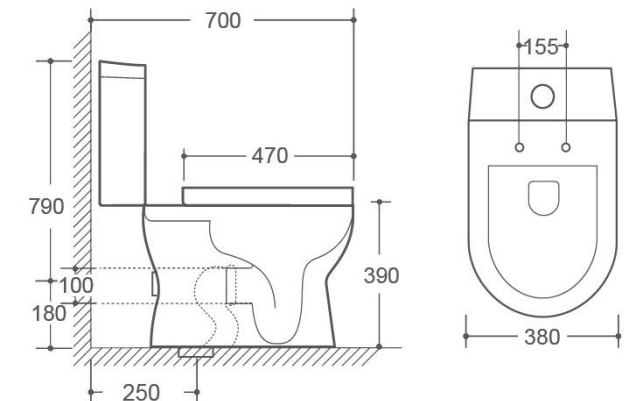

Type: two-piece toilet

Dimension: 650×340×770mm

Rough-in: S-trap 250mm

Rough-in: P-trap 180mm

Flushing mode: Washdown

DXC2331